

Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) EP 1 387 340 A1

(12) EUROPEAN PATENT APPLICATION

(43) Date of publication:
04.02.2004 Bulletin 2004/06

(51) Int Cl.7: G09G 3/28, G09G 3/20

(21) Application number: 02291924.5

(22) Date of filing: 30.07.2002

(84) Designated Contracting States:
AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
IE IT LI LU MC NL PT SE SK TR
Designated Extension States:
AL LT LV MK RO SI

• Thebault, M. Cedric
78050 Villingen (DE)
• Doyen, M. Didier
35340 La Bouexlere (FR)

(71) Applicant: DEUTSCHE THOMSON-BRANDT
GMBH
78048 Villingen-Schwenningen (DE)

(74) Representative: Ruellian-Lemonnier, Brigitte
THOMSON multimedia,
46 quai A. Le Gallo
92648 Boulogne Cédex (FR)

(72) Inventors:
• Weltbruch, M. Sebastien
78087 Monchweiler (DE)

(54) Method and device for processing video data for a display

(57) In order to improve the picture quality of plasma display panels and to reduce differences to present CRTs dithering is used. However, the dithering pattern may appear on the retina for some movement having a spatio-temporal period similar to those from dithering.

Therefore, it is proposed to use motion vectors coming from a motion estimator (14) in order to suppress the visibility of the dithering in case of motion. Then, for the viewer the quality of moving pictures will be similar to those obtained for static pictures.

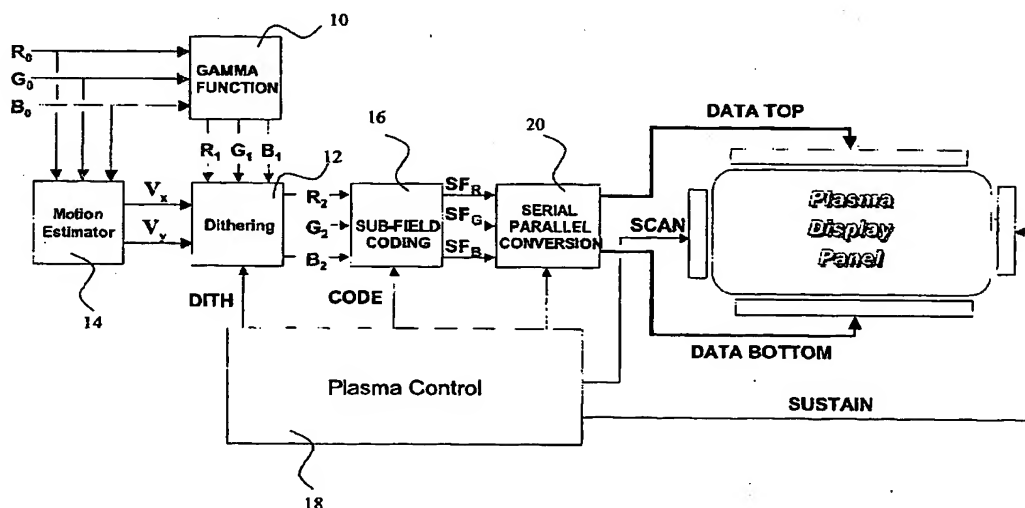


Fig. 3

EP 1 387 340 A1

Description

[0001] The present invention relates to a method for processing video data for display on a display device having a plurality of luminous elements by applying a dithering function to at least a part of the video data to refine the grey scale portrayal of video pictures of the video data. Furthermore, the present invention relates to a corresponding device for processing video data including dithering means.

Background

[0002] A PDP (Plasma Display Panel) utilizes a matrix array of discharge cells, which can only be "ON", or "OFF". Unlike a CRT or LCD in which grey levels are expressed by analogue control of the light emission, a PDP controls the grey level by modulating the number of light pulses per frame (sustain pulses). This time-modulation will be integrated by the eye over a period corresponding to the eye time response. Since the video amplitude is portrayed by the number of light pulses, occurring at a given frequency, more amplitude means more light pulses and thus more "ON" time. For this reason, this kind of modulation is also known as PWM, pulse width modulation.

[0003] This PWM is responsible for one of the PDP image quality problems: the poor grey scale portrayal quality, especially in the darker regions of the picture. This is due to the fact, that displayed luminance is linear to the number of pulses, but the eye response and sensitivity to noise is not linear. In darker areas the eye is more sensitive than in brighter areas. This means that even though modern PDPs can display ca. 255 discrete video levels, quantization error will be quite noticeable in the darker areas.

[0004] As mentioned before, a PDP uses PWM (pulse width modulation) to generate the different shades of grey. Contrarily to CRTs where luminance is approximately quadratic to applied cathode voltage, luminance is linear to the number of discharge impulses. Therefore an approximately digital quadratic gamma function has to be applied to video before the PWM.

[0005] Due to this gamma function, for smaller video levels, many input levels are mapped to the same output level. In other words, for darker areas, the output number of quantization bits is smaller than the input number. In particular for values smaller than 16 (when working with 8 bit for video input) that are all mapped to 0. This also counts for four bit resolution which is actually unacceptable for video.

[0006] One known solution to improve the quality of the displayed pictures is to artificially increase the number of displayed video levels by using dithering. Dithering is a known technique for avoiding to loose amplitude resolution bits due to truncation. However, this technique only works if the required resolution is available before the truncation step. Usually this is the case in most applications, since the video data after a gamma operation used for pre-correction of the video signal has 16-bit resolution. Dithering can bring back as many bits as those lost by truncation in principle. However, the dithering noise frequency decreases, and therefore becomes more noticeable, with the number of dithered bits.

[0007] The concept of dithering shall be explained by the following example. A quantization step of 1 shall be reduced by dithering. The dithering technique uses the temporal integration property of the human eye. The quantization step may be reduced to 0,5 by using 1-bit dithering. Accordingly, half of the time within the time response of the human eye there is displayed the value 1 and half of the time there is displayed the value 0. As a result the eye sees the value 0,5. Optionally, the quantization steps may be reduced to 0,25. Such dithering requires two bits. For obtaining the value 0,25 a quarter of the time the value 1 is shown and three quarters of the time the value 0. For obtaining the value 0,5 two quarters of the time the value 1 and two quarters of the time the value 0 is shown. Similarly, the value 0,75 may be generated. In the same manner quantization steps of 0,125 may be obtained by using 3-bit dithering. This means that 1 bit of dithering corresponds to multiply the number of available output levels by 2, 2 bits of dithering multiply by 4, and 3 bits of dithering multiply by 8 the number of output levels. A minimum of 3 bits of dithering may be required to give to the grey scale portrayal a 'CRT' look.

[0008] Proposed dithering methods in the literature (like error diffusion) were mainly developed to improve quality of still images (fax application and newspaper photo portrayal). Results obtained are therefore not optimal if the same dithering algorithms are directly applied to PDPs and mainly in the displaying of video with motion.

[0009] The dithering most adapted to PDP until now is the Cell-Based Dithering, described in the European patent application EP-A-1 136 974 and Multi-Mask dithering described in the European patent application with the filing number 01 250 199.5, which improves grey scale portrayal but adds high frequency low amplitude dithering noise. It is expressly referred to both documents.

[0010] Cell-based dithering adds a temporal dithering pattern that is defined for every panel cell and not for every panel pixel as shown in Fig. 1. A panel pixel is composed of three cells: red, green and blue cell. This has the advantage of rendering the dithering noise finer and thus less noticeable to the human viewer.

[0011] Because the dithering pattern is defined cell-wise, it is not possible to use techniques like error-diffusion, in order to avoid colouring of the picture when one cell would diffuse in the contiguous cell of a different colour. This is

not a big disadvantage, because it has been observed sometimes an undesirable low frequency moving interference, between the diffusion of the truncation error and a moving pattern belonging to the video signal. Error diffusion works best in case of static pictures. Instead of using error diffusion, a static 3-dimensional dithering pattern is proposed.

[0012] This static 3-dimensional dithering is based on a spatial (2 dimensions x and y) and temporal (third dimension t) integration of the eye. For the following explanations, the matrix dithering can be represented as a function with three variables: $\phi(x,y,t)$. The three parameters x, y and t will represent a kind of phase for the dithering. Now, depending on the number of bits to be rebuilt, the period of these three phases can evolve.

[0013] Figure 2 illustrates the 3-dimensional matrix concept. The values displayed on the picture slightly change for each plasma cell in the vertical and horizontal directions. In addition, the value also changes for each frame.

In the example of figure 2, for the frame displayed at time t_0 the following dithering values are given:

$$\phi(x_0, y_0, t_0) = A$$

$$\phi(x_0 + 1, y_0, t_0) = B$$

$$\phi(x_0 + 1, y_0 + 1, t_0) = A$$

$$\phi(x_0, y_0 + 1, t_0) = B$$

[0014] One frame later, the dithering values are at time $t_0 + 1$:

$$\phi(x_0, y_0, t_0 + 1) = B$$

$$\phi(x_0 + 1, y_0, t_0 + 1) = A$$

$$\phi(x_0 + 1, y_0 + 1, t_0 + 1) = B$$

$$\phi(x_0, y_0 + 1, t_0 + 1) = A$$

[0015] The spatial resolution of the eye is good enough to be able to see a fixed static pattern A, B, A, B but if a third dimension, namely the time, is added in the form of an alternating function, then the eye will be only able to see the average value of each cell.

[0016] The case of a cell located at the position (x_0, y_0) shall be considered. The value of this cell will change from frame to frame as following $\phi(x_0, y_0, t_0) = A$, $\phi(x_0, y_0, t_0 + 1) = B$, $\phi(x_0, y_0, t_0 + 2) = A$ and so on.

[0017] The eye time response of several milliseconds (temporal integration) can be then represented by the following formula:

$$Eye(x_0, y_0) = \frac{1}{T} \sum_{t=t_0}^{t=t_0+T} \phi(x_0, y_0, t)$$

which, in the present example, leads to

$$Eye(x_0, y_0) = \frac{A + B}{2}$$

[0018] It should be noted that the proposed pattern, when integrated over time, always gives the same value for all

panel cells. If this would not be the case, under some circumstances, some cells might acquire an amplitude offset to other cells, which would correspond to an undesirable fixed spurious static pattern.

[0019] While displaying moving objects on the plasma screen, the human eye will follow the objects and no more integrates the same cell of the plasma (PDP) over the time. In that case, the third dimension will no more work perfectly

and a dithering pattern can be seen.

[0020] In order to better understand this problem, the following example of a movement $\vec{V} = (1;0)$ shall be looked at, which represents a motion in x-direction of one pixel per frame. In that case, the eye will look at (x_o, y_o) at time t_o and then it will follow the movement to pixel (x_o+1, y_o) at time t_o+1 and so on. In that case, the cell seen by the eye will be defined as following:

$$Eye = \frac{1}{T}(\varphi(x_o, y_o, t_o) + \varphi(x_o+1, y_o, t_o+1) + \dots + \varphi(x_o+T, y_o, t_o+T))$$

which corresponds to

$$Eye = \frac{1}{T}(A + A + \dots + A) = A.$$

In that case, the third dimension aspect of the dithering will not work correctly and only the spatial dithering will be available. Such an effect will make the dithering more or less visible depending on the movement. The dithering pattern is no longer hidden by the spatial and temporal eye integration.

[0021] In view of that it is the object of the present invention to eliminate a dithering pattern appearing for a viewer observing a moving object on a picture.

[0022] According to the present invention this object is solved by a method for processing video data for display on a display device having a plurality of luminous elements by applying a dithering function to at least part of said video data to refine the grey scale portrayal of video pictures of said video data, computing at least one motion vector from said video data and changing the phase, amplitude, spatial resolution and/or temporal resolution of said dithering function in accordance with said at least one motion vector when applying the dithering function to said video data.

[0023] Furthermore, according to the present invention there is provided a device for processing video data for display on a display device having a plurality of luminous elements including dithering means for applying a dithering function to at least a part of said video data to refine the grey scale portrayal of video pictures of said video data, and motion estimation means connected to said dithering means for computing at least one motion vector from said video data, wherein the phase, amplitude, spatial resolution and/or temporal resolution of said dithering function is changeable in accordance with said at least one motion vector.

[0024] Fortunately, the dithering function or pattern has two spatial dimensions and one temporal dimension. Such a dithering function enables an enhanced reduction of quantization steps in the case of static pictures compared to error diffusion.

[0025] The dithering function may be based on a plurality of masks. Thus, different dither patterns may be provided for different entries in a number of least significant bits of the data word representing the input video level. This makes it possible to suppress the disturbing patterns occurring on the plasma display panel when using the conventional dither patterns.

[0026] Furthermore, the application of the dithering function or pattern may be based on single luminous elements called cells of the display device. I.e. to each colour component R, G, B of a pixel separate dithering numbers may be added. Such cell based dithering has the advantage of rendering the dithering noise finer and thus making it less noticeable to the human viewer.

[0027] The dithering may be performed by a 1-, 2-, 3-, and/or 4-bit function. The number of bits used depends on the processing capability. In general 3-bit dithering is enough so that most of the quantization noise is not visible.

[0028] Preferably, the motion vector is computed for each pixel individually. By doing so the quality of higher resolution dithering can be enhanced compared to a technique where the motion vector is computed for a plurality of pixels or a complete area.

[0029] Furthermore, the motion vector should be computed for both spatial dimensions x and y. Thus, any movement of an object observed by the human viewer may be regarded for the dithering process.

[0030] As already mentioned, a pre-correction by the quadratic gamma function should be performed before the dithering process. Thus, also the quantization errors produced by the gamma function correction are reduced with the help of dithering.

[0031] The temporal component of the dithering function may be introduced by controlling the dithering in the rhythm of picture frames. Thus, no additional synchronisation has to be provided.

[0032] The dithering according to the present invention may be based on a Cell-based and/or Multi-Mask dithering,

which consists in adding a dithering signal that is defined for every plasma cell and not for every pixel. In addition, such a dithering may further be optimized for each video level. This makes the dithering noise finer and less noticeable to the human viewer.

[0033] The adaptation of the dithering pattern to the movement of the picture in order to suppress the dithering structure appearing for specific movement may be obtained by using a motion estimator to change the phase or other parameters of the dithering function for each cell. In that case, even if the eye is following the movement, the quality of the dithering will stay constant and a pattern of dithering in case of motion will be suppressed. Furthermore, this invention can be combined with any kind of matrix dithering.

Drawings

[0034] Exemplary embodiments of the invention are illustrated in the drawings and are explained in more detail in the following description. In the drawings:

Figure 1 shows the principal of the pixel-based dithering and cell based dithering;

Figure 2 illustrates the concept of 3-dimensional matrix dithering; and

Figure 3 shows a block diagram of a hardware implementation for the algorithm according to the present invention.

Exemplary embodiments

[0035] In order to suppress the visible pattern of a classical matrix dithering in case of moving pictures the motion of the picture is taken into account by using a motion estimator.

[0036] This will provide, for each pixel $M(x_o, y_o)$ of the screen, a vector

$$\vec{V}(x_o, y_o) = (V_x(x_o, y_o), V_y(x_o, y_o))$$

representing its movement. In that case, this vector can be used to change the phase of the dithering according to the formula:

$$\phi(x_o - V_x(x_o, y_o), y_o - V_y(x_o, y_o), t_o).$$

More generally, the new dithering pattern will depend on five parameters and can be defined as following:

$$\zeta(x_o, y_o, V_x(x_o, y_o), V_y(x_o, y_o), t).$$

A big advantage of such a motion compensated dithering is its robustness regarding the motion vector. In fact, the role of the motion vectors is to avoid any visible pattern of the dithering during a movement that suppresses the temporal integration of the eye. Even if the motion vectors are not exact, they can suppress the pattern.

[0037] Preferably 3-bit dithering is implemented so that up to 8 frames are used for dithering. If the number of frames used for dithering is increased, the frequency of the dithering might be too low, and so flicker will appear. Mainly 3-bit dithering is rendered with a 4-frames cycle and a 2D spatial component.

[0038] Figure 3 illustrates a possible implementation for the algorithm. RGB input pictures indicated by the signals R_0 , G_0 and B_0 are forwarded to a gamma function block 10. It can consist of a look up table (LUT) or it can be formed by a mathematical function. The outputs R_1 , G_1 and B_1 of the gamma function block 10 are forwarded to a dithering block 12 which takes into account the pixel position and the frame parity as temporal component for the computation of the dithering value. The frame parity is based on the frame number within one dithering cycle. For instance, within a 3-bit dithering based on a 4-frames cycle the frame number changes cyclically from 0 to 3.

[0039] In parallel to that, the input picture R_0 , G_0 and B_0 is also forwarded to a motion estimator 14, which will provide, for each pixel, a motion vector (V_x, V_y) . This motion vector will be additionally used by the dithering block 12 for computing the dithering pattern.

[0040] The video signals R_1 , G_1 , B_1 subjected to the dithering in the dithering block 12 are output as signals R_2 , G_2 ,

B2 and are forwarded to a sub-field coding unit 16 which performs sub-field coding under the control of the control unit 18. The plasma control unit 18 provides the code for the sub-field coding unit 16 and the dithering pattern DITH for the dithering block 12.

[0041] As to the sub-field coding it is expressly referred to the already mentioned European patent application EP-A-1 136 974.

[0042] The sub-field signals for each colour output from the sub-field coding unit 16 are indicated by reference signs SF_R , SF_G , SF_B . For plasma display panel addressing, these sub-field code words for one line are all collected in order to create a single very long code word which can be used for the linewise PDP addressing. This is carried out in a serial to parallel conversion unit 20 which is itself controlled by the plasma control unit 18.

[0043] Furthermore, the control unit 18 generates all scan and sustain pulses for PDP control. It receives horizontal and vertical synchronizing signals for reference timing.

[0044] Although the present embodiment requires the use of a motion estimator, such a motion estimator is already mandatory for other skills like false contour compensation, sharpness improvement and phosphor lag reduction. Since the same vectors can be reused the extra costs are limited.

[0045] Motion compensated dithering is applicable to all colour cell based displays (for instance colour LCDs) where the number of resolution bits is limited.

[0046] In all cases the present invention brings the advantages of suppressing the visible pattern of classical matrix dithering in case of moving pictures and of strong robustness regarding the motion vector field.

Claims

1. Method for processing video data (R_0 , G_0 , B_0) for display on a display device having a plurality of luminous elements by applying a dithering function to at least part of said video data (R_0 , G_0 , B_0) to refine the grey scale portrayal of video pictures of said video data, characterized by computing at least one motion vector from said video data (R_0 , G_0 , B_0) and changing the phase, amplitude, spatial resolution and/or temporal resolution of said dithering function in accordance with said at least one motion vector when applying the dithering function to said video data (R_0 , G_0 , B_0).
2. Method according to claim 1, wherein said dithering function includes two spatial dimensions and one temporal dimension.
3. Method according to claim 1 or 2, wherein said dithering function includes the application of a plurality of masks.
4. Method according to claim 1 or 2, wherein said applying of said dithering function is based on single luminous elements called cells of said display device.
5. Method according to one of the claims 1 to 4, wherein said dithering function is a 1-, 2-, 3- and/or 4- bit dithering function.
6. Method according to one of the claims 1 to 5, wherein said at least one motion vector is defined for each pixel or cell individually.
7. Method according to one of the claims 1 to 6, wherein said at least one motion vector has two spatial dimensions.
8. Device for processing video data (R_0 , G_0 , B_0) for display on a display device having a plurality of luminous elements including dithering means (12) for applying a dithering function to at least a part of said video data (R_0 , G_0 , B_0) to refine the grey scale portrayal of video pictures of said video data (R_0 , G_0 , B_0), characterized by motion estimations means (14) connected to said dithering means (12) for computing at least one motion vector (V_x , V_y) from said video data (R_0 , G_0 , B_0), wherein the phase, amplitude, spatial resolution and/or temporal resolution of said dithering function is changeable in accordance with said at least one motion vector (V_x , V_y).
9. Device according to claim 8, wherein said dithering function used by said dithering means (12) includes two spatial dimensions and a temporal dimension.

EP 1 387 340 A1

10. Device according to claim 8 or 9, wherein said dithering function of said dithering means (12) is based on a plurality of masks.
- 5 11. Device according to claim 8 or 9, wherein said dithering function of said dithering means (12) is based on single luminous elements called cells of said display device.
12. Device according to one of the claims 8 to 11, wherein said dithering means (12) is able to process a 1-, 2-, 3- and/or 4-bit dithering function.
- 10 13. Device according to one of the claims 8 to 12, wherein said at least one motion vector (V_x , V_y) is definable for each pixel individually by said motion estimation means (14).
14. Device according to one of the claims 8 to 13, wherein said at least one motion vector (V_x , V_y) includes two spatial dimensions.
- 15 15. Device according to one of the claims 8 to 14, further including gamma function means (10) connected to said dithering means (12), so that the input signals of said dithering means (12) are pre-corrected by a gamma function.
- 20 16. Device according to one of the claims 8 to 15, further including controlling means (18) connected to said dithering means (12) for controlling said dithering means (12) temporally in dependence of frames of said video data (R_0 , G_0 , B_0).

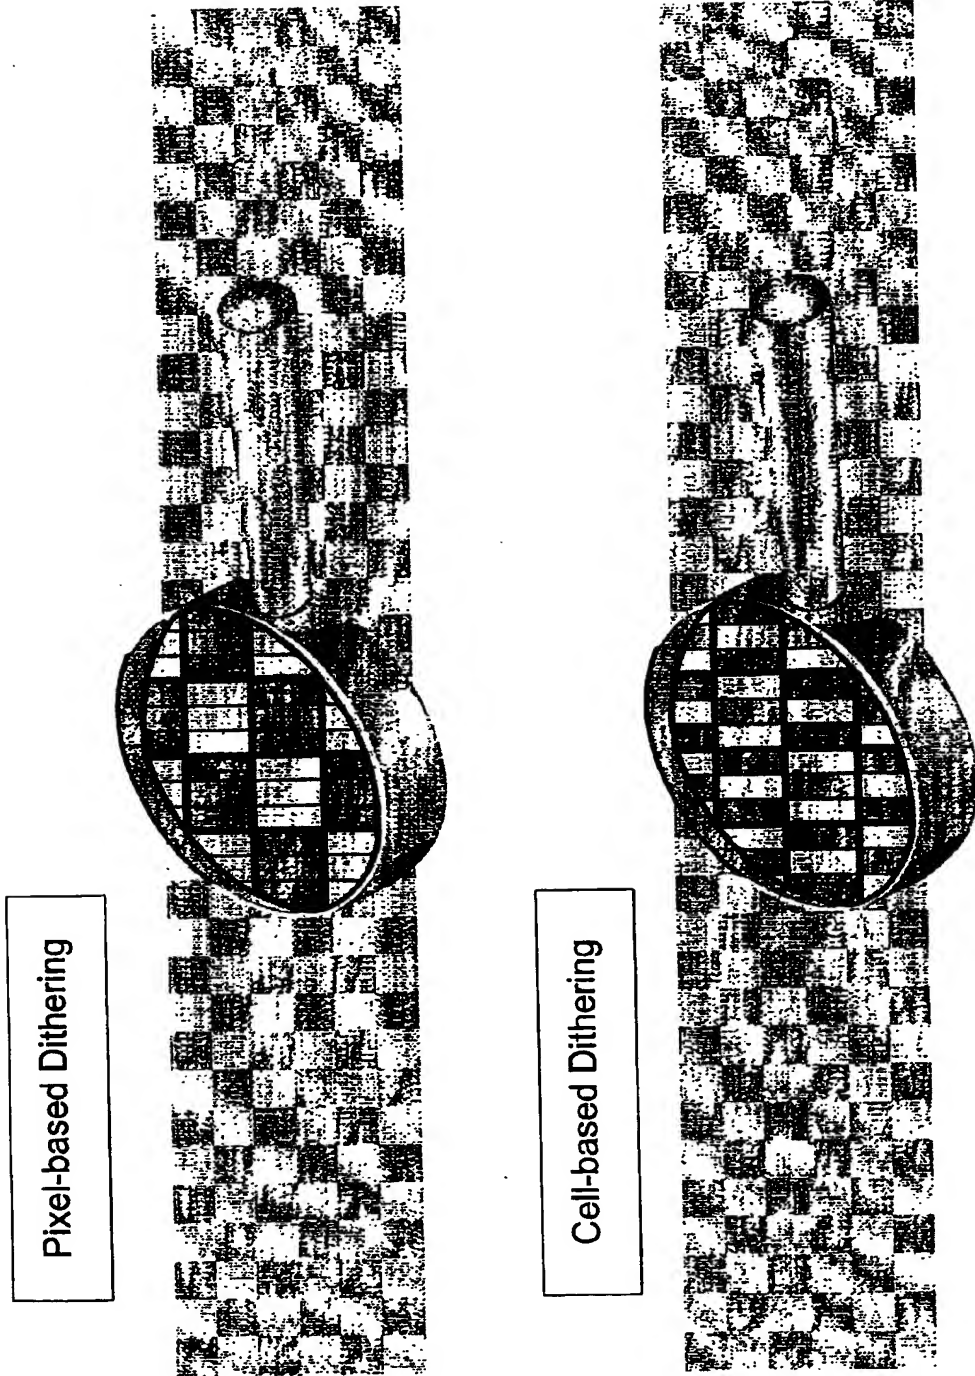


Fig. 1

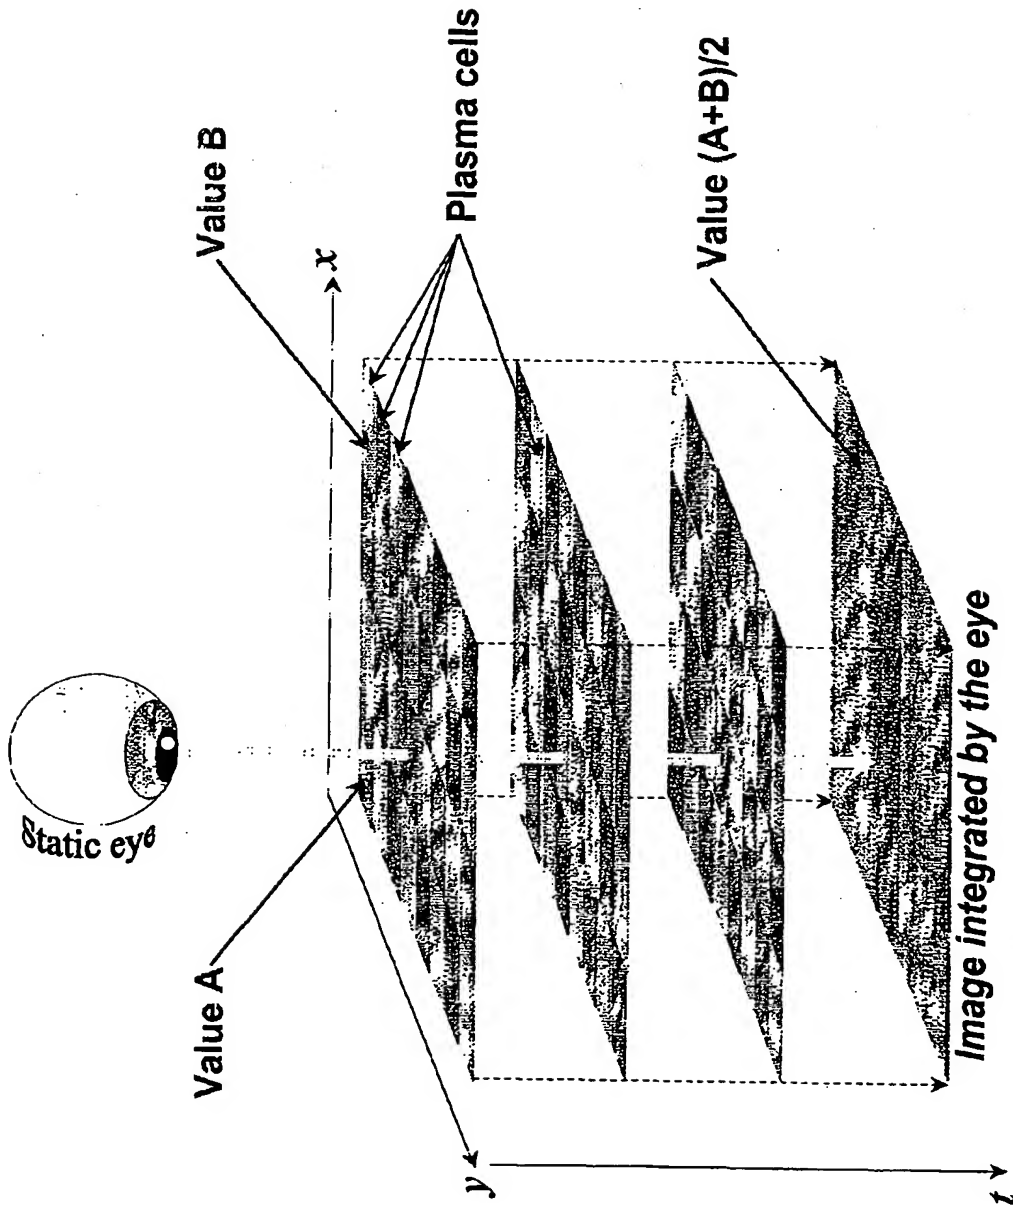


Fig. 2

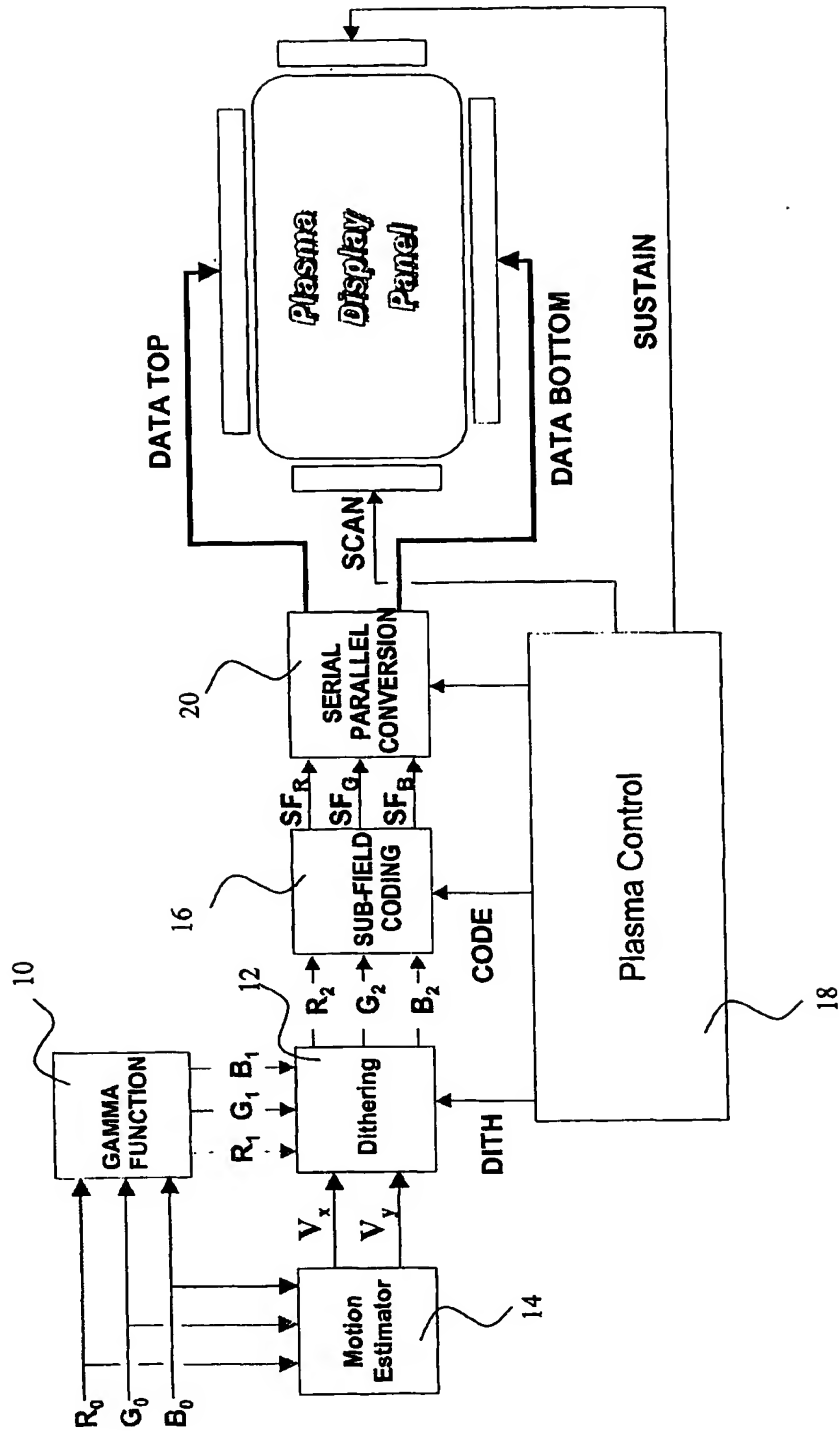


Fig. 3



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 02 29 1924

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
X	EP 0 656 616 A (TEXAS INSTRUMENTS INC) 7 June 1995 (1995-06-07)	1,2,4,6, 9,11,12, 15,16	G09G3/28 G09G3/20
A	* abstract * * page 2, line 27 - line 30 * * page 3, line 3 - line 32 * * page 4, line 13 - line 24 * * page 5, line 33 - page 6, line 18; figures 1-10 *	3,5,7,8, 10,13,14	
X	WO 91 10324 A (MASSACHUSETTS INST TECHNOLOGY) 11 July 1991 (1991-07-11)	1,2,4,6, 9,11,12, 15,16	
A	* abstract * * page 12, line 1 - line 20 * * page 13, line 1 - line 13 * * page 19, line 1 - line 12 * * page 32, line 1 - line 15; figures 1-11	3,5,7,8, 10,13,14	
A	US 6 288 698 B1 (ISHII TAKATOSHI ET AL) 11 September 2001 (2001-09-11) * abstract * * column 1, line 34 - line 60 * * column 5, line 39 - line 62; figure 3 *	1,8	TECHNICAL FIELDS SEARCHED (Int.Cl.7) G09G H04N
A,D	EP 1 136 974 A (THOMSON BRANDT GMBH) 26 September 2001 (2001-09-26) * the whole document *	1-16	
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 23 April 2003	Examiner O'Reilly, D
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document</p>			

EPO FORM 1500 (3.02) (P/C/O/01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 02 29 1924

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

23-04-2003

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
EP 0656616	A	07-06-1995	CN 1119808 A	03-04-1996
			EP 0656616 A1	07-06-1995
			JP 7231416 A	29-08-1995

WO 9110324	A	11-07-1991	AU 650256 B2	16-06-1994
			AU 7166491 A	24-07-1991
			CA 2048623 A1	29-06-1991
			EP 0462261 A1	27-12-1991
			JP 4505537 T	24-09-1992
			WO 9110328 A1	11-07-1991
			WO 9110324 A1	11-07-1991
			US 5543939 A	06-08-1996

US 6288698	B1	11-09-2001	NONE	

EP 1136974	A	26-09-2001	EP 1136974 A1	26-09-2001
			AU 3928301 A	03-10-2001
			WO 0171702 A2	27-09-2001
			EP 1269457 A2	02-01-2003

EPO FORM P0169

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☒ **BLACK BORDERS**
- ☒ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☒ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☒ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.
As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.

This Page Blank (uspto)